

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. Read them carefully and completely before installing the chandelier.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE CODES BY A QUALIFIED PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- This fixture requires four (4) E12-base bulbs, 40 W maximum per bulb (not included).
- To reduce the risk of fire, do not exceed the maximum wattage shown on the fixture label.
- Suitable for indoor, dry locations only.
- Connect only to a grounded, 120 V single-phase branch circuit.
- Keep the fixture, packaging, and small parts away from children.

WARNING:

- Turn off the electrical supply at the main circuit panel before installation. Verify that the power is off before touching any wiring. Do not restore power until the chandelier is completely assembled and installed.
- To reduce the risk of fire, electric shock, or personal injury, turn off the chandelier and allow it to cool before replacing a bulb. Do not touch a bulb while the fixture is on or look directly at a lit bulb.
- Keep flammable materials away from the bulbs.

PRE-ASSEMBLY:


- Remove all parts and hardware from the carton and protective packaging. Do not discard any contents until installation is complete.
- Due to the fixture's size and weight, a minimum of two qualified installers and an appropriate lifting device are required. Do not lift or support the chandelier by its electrical wires.

TOOLS REQUIRED (NOT INCLUDED):

Phillips screwdriver, slotted screwdriver, wire strippers, slip-joint pliers, measuring tape, adjustable wrenches, and wire cutters.

CHANDELIER INSTALLATION

A	Wire Connectors	3pcs
B	Mounting Plate	1pc
C	Mounting Screws	2pcs
D	Ground Screw	1pc
E	Canopy	1pc
F	Finial	2pcs
G	Chain(120")	2pcs
H	Collar Loop	4pcs
I	Quick Link	4pcs
J	Connecting Rod	2pcs
K	Shade	1pc
L	Fixture Body	1pc

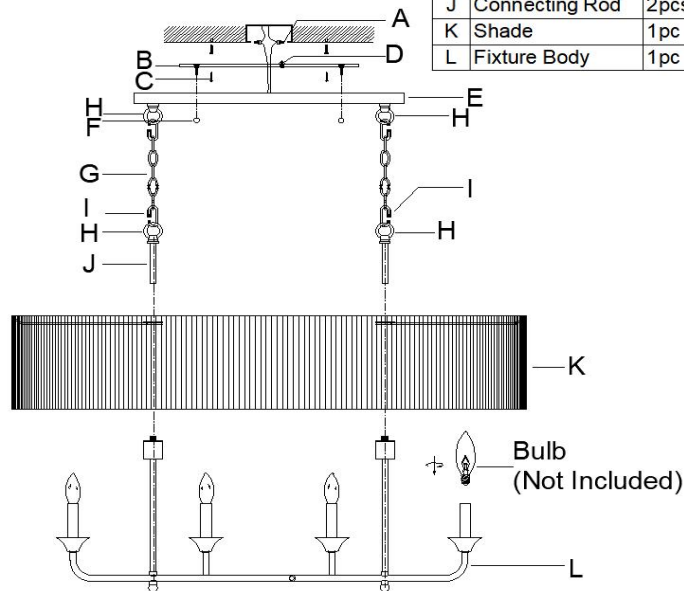

- Unpack the Fixture:** Carefully remove all parts from the carton and place them on a clean, soft surface to prevent damage.
- Turn Off Power:** Turn off the electrical supply at the main circuit panel and verify that the power is off.
- Install the Collar Loops:** The two upper Collar Loops (H) are preinstalled on Canopy (E). Secure the remaining two Collar Loops (H) to Connecting Rods (J) and tighten securely.
- Install the Shade:** Position Shade (K) over the upper threaded ends of Connecting Rods (J), then secure it by tightening the lower threaded sections of Collar Loops (H).
- Set the Hanging Height and Attach the Chains:** Determine the desired hanging height and shorten both Chains (G) equally, if necessary. Using one Quick Link (I) at each end of each chain, connect the lower ends of both Chains (G) to the Collar Loops (H) on Connecting Rods (J), and connect the upper ends to the preinstalled Collar Loops (H) on Canopy (E). Close and securely tighten all four Quick Links (I). Confirm that both chains are equal in length and are not twisted.
- Prepare the Mounting System:** Remove Mounting Plate (B) from Canopy (E) by loosening Finials (F). Secure Mounting Plate (B) to a listed outlet box that is securely fastened to the building structure and rated for the full fixture load, using Mounting Screws (C).
- Prepare the Fixture Wires:** Carefully unwind the fixture wires. Trim excess wire while leaving sufficient length to reach the junction box. Strip approximately 5/8 in. (16 mm) of insulation from the end of each wire.
- Make the Electrical Connections:** Connect the fixture ground wire (bare copper or green) to the building ground wire with the supplied wire connector.
 - Connect the fixture neutral wire, labeled "N," to the white building neutral wire.
 - Connect the fixture hot wire, labeled "L," to the black building hot wire.**CAUTION:** Do not reverse the hot and neutral connections.
- Complete the Wiring:** Confirm that all wire connectors are tight. Carefully place the conductors inside the junction box. Ensure that no wires are pinched or in contact with sharp edges.
- Install the Canopy:** Raise Canopy (E) to the ceiling and secure it to Mounting Plate (B) by tightening Finials (F). Confirm that the canopy sits flush against the ceiling.
- Level and Inspect the Fixture:** Confirm that the fixture is level and that Canopy (E) sits flush against the ceiling. Verify that the chains, quick links, collar loops, connecting rods, screws, threaded connections, and mounting hardware are securely fastened.
- Install the Bulbs:** Install four (4) E12-base bulbs, 40 W maximum per bulb. Do not exceed the wattage shown on the fixture label. Keep the power off during installation.
- Final Inspection and Testing:** Confirm that all tools and packaging have been removed, and no wires are exposed or pinched. Restore power and test the fixture.

Maintenance

- Disconnect electrical power before cleaning or servicing the fixture.
- Clean with a soft, dry cloth only.
- Periodically inspect the connecting rods, threaded connections, screws, finials, and mounting hardware to confirm that they remain secure.
- Do not use abrasive cleaners, solvents, or chemical cleaning products.

INSTALLATION CHECKLIST:

- ☐ Outlet box and structural support system are securely fastened and rated for the full fixture load
- ☐ Mounting plate is securely installed
- ☐ Chains, quick links, collar loops, connecting rods, screws, finials, threaded connections, and mounting hardware are securely tightened
- ☐ Fixture is level and securely mounted
- ☐ Electrical connections are complete and correctly matched
- ☐ Ground wire is connected
- ☐ Wire connectors are secure
- ☐ Wiring is safely placed inside the junction box without pinching
- ☐ Canopy is installed flush against the ceiling
- ☐ The shade is securely installed
- ☐ Fixture has been tested and operates correctly