



TERRACOTTA DESIGNS

MODEL:H24101P-3

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the chandelier.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HARZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from **3 x 40watt Max E12** standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. DRY LOCATION ONLY. It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- **Keep it away from children.**

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your chandelier is fully assembled and installed.
 - To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool
- Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. **Do not** discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

1. Remove all parts from the package and remove all plastic coverings.
2. Attach the mounting bar (B) to the outlet box using screws (C).
3. Pull the wires from the outlet box and let them hang.
4. Inspect the fixture's wires: 'N' for NEUTRAL, 'L' for HOT, and the unmarked GREEN wire for GROUND.
5. Connect the fixture's GROUND wire to the outlet's GROUND wire (green or bare) using a wire connector (A).
6. Connect the NEUTRAL wire to the NEUTRAL outlet wire (white) and the HOT wire to the HOT outlet wire (black) using wire connectors (A). Wrap the connections with electrical tape.
7. Tuck the wire connections neatly into the ceiling junction box.
8. Secure the canopy (E) to the ceiling with screws.
9. Adjust the chain to the desired length. Attach one end of the chain to the fixture's collar loop with a link loop (F) and the other end to the hanging nut under the canopy with another link loop (F). Ensure the chain, not the power cord, supports the fixture's weight.
- 10 Assemble the arms and glasses following the pattern specified in the steps below and diagrams:
 - 10.1 Attach tube A1 to the cluster, add a rubber pad (K), glass G1, another rubber pad (K), screw tube A2, another rubber pad (K), glass G3, and cap with a Nut (L).
 - 10.2 Repeat for the second arm: Attach tube A1 to the cluster, add a rubber pad (K), glass G2, another rubber pad (K), screw tube A2, another rubber pad (K), glass G4, and cap with a Nut (L).
11. Install the bulbs (not included) and turn on the power.


PARTS ENCLOSED:

- (A)Wire Connectors (3)
- (B)Mounting Bar (1)
- (C) Mounting screw (3)
- (D)Green Ground Screw (1)
- (E)Canopy & Chain (1)
- (F)Link Loop (1)
- (G)Collar Loop (1)
- (K) Rubber Pad:12PCS
- (L) Nuts:6PCS
- Screw TubeA1:6PCS
- Screw TubeA2:6PCS
- Glass G1: 3PCS Glass G2: 3PCS
- Glass G3: 3PCS Glass G4: 3PCS

TOOLS REQUIRED:

- **Philips screwdriver**
- **Electrical tape**
- **Wire cutters**

MODEL: H24101P-3

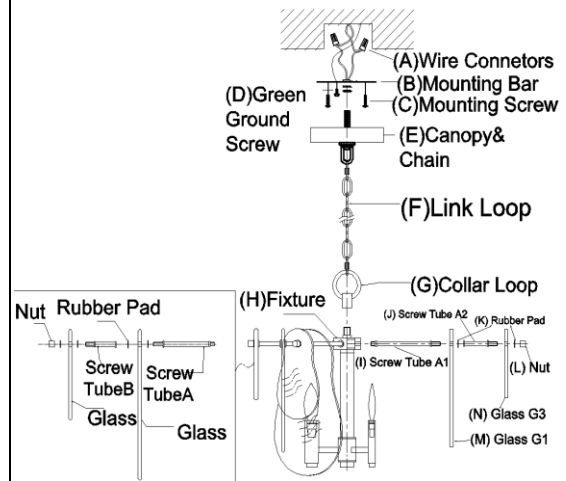

CARE INSTRUCTIONS:

1. **Make sure that power is turned off and bulb has cooled before handling.**
2. **Wipe clean with a dry cloth/mild soapy solution. Do not use corrosive cleaners.**
3. **The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.**

H24101P-3

