



TERRACOTTA DESIGNS

MODEL:H24101M-7

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the chandelier.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HARZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from **7 x 40watt Max E12** standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. DRY LOCATION ONLY. It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- **Keep it away from children.**

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your chandelier is fully assembled and installed.
 - To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool
- Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- *Keep flammable materials away from light bulb*

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. **Do not** discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

1. Remove all parts from the package and plastic coverings.
2. Estimate the installation height of the chandelier, then assemble the hanging stem using (G) Pole A and (H) Pole B, C. Attach and secure the bottom of the stem to the fixture and the top to the hanging nut under the canopy.
3. Attach the mounting bar (B) to the outlet box with screws (C).
4. Pull the wires from the outlet box and let them hang.
5. Inspect the fixture's wires: 'N' for NEUTRAL, 'L' for HOT, and the unmarked GREEN wire for GROUND.
6. Connect the fixture's GROUND wire to the outlet's GROUND wire (green or bare) using a wire connector (A).
7. Connect the NEUTRAL wire to the NEUTRAL outlet wire (white) and the HOT wire to the HOT outlet wire (black) with wire connectors (A). Wrap connections with electrical tape.
8. Tuck the wire connections into the ceiling junction box.
9. Secure the canopy (E) to the ceiling with screws, letting the fixture body hang freely.
- 10 Assemble the arms and glass:
Starting from the bottom (second layer), follow the pattern of arms as specified in the steps and diagrams.

10.1 Second (Bottom) Layer: Attach tube C1 to the cluster, add a rubber pad (L), glass G1, another rubber pad (L), and cap with a Nut (M). Repeat with tube C2 and glass G2.

10.2 First (Top) Layer: Attach tube A1 to the cluster, add a rubber pad (L), glass G1, a rubber pad (L), screw tube A2, a rubber pad (L), glass G3 (J), and cap with a Nut (M). Repeat with tube B1, glass G2, tube B2 and Glass G4
11. Install bulbs (not included) and turn on the power.


PARTS ENCLOSED:

- | | |
|------------------------------------|----------------------|
| (A)Wire Connectors (3) | |
| (B)Mounting Bar (1) | |
| (C) Mounting screw (3) | |
| (D)Green Ground Screw (1) | |
| (E)Canopy (1) | |
| (F)Link Loop (1) | |
| (I)Fixture | |
| (G)Connecting Pole A (2PCS) 6 inch | |
| (H)Connecting Pole B (2PCS) 12inch | |
| Connecting Pole C (2 PCS) 18inch | |
| (J) Screw Tube A1 (6PCS) | Screw Tube B1 (6PCS) |
| (K) Screw Tube A2 (6PCS) | Screw Tube B2 (6PCS) |
| (P) Screw Tube C1 (3PCS) | Screw Tube C2 (3PCS) |
| (N) Glass G1 (9PCS) | Glass G2 (9PCS) |
| (O) Glass G3 (6PCS) | Glass G4 (6PCS) |

TOOLS REQUIRED:

- Philips screwdriver
- Electrical tape
- Wire cutters


MODEL: H24101M-7

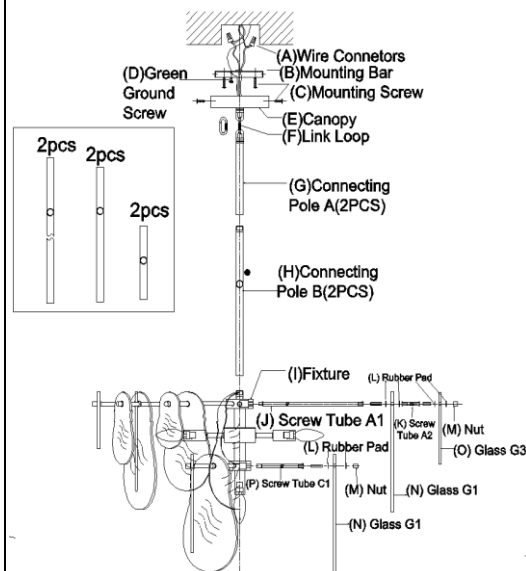

CARE INSTRUCTIONS:

1. Make sure that power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth/mid soapy solution. Do not use corrosive cleaners.
3. The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.

(A) Wire Connectors
(B) Mounting Bar
(C) Mounting Screw
(D) Green Ground Screw
(E) Canopy
(F) Link Loop

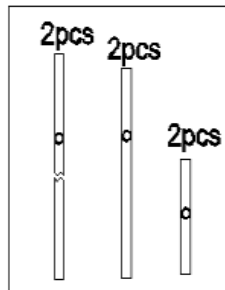

(G) Connecting Pole A(2PCS)

(H) Connecting Pole B(2PCS)

(I) Fixture

(J) Screw Tube A1

(K) Screw Tube A2

(L) Rubber Pad

(M) Nut

(N) Glass G1

(O) Glass G3

(P) Screw Tube C1


(Q) Glass G2

(R) Glass G4

First Layer

(L) Rubber Pad:24PCS
(M) Nuts:12PCS

(J) Screw Tube A1:6PCS
Screw Tube B1:6PCS
(K) Screw Tube A2:6PCS
Screw Tube B2:6PCS

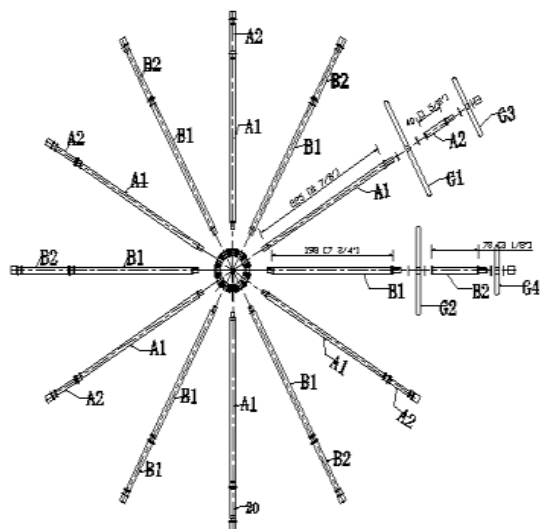

Second Layer

(L) Rubber Pad:6PCS
(M) Nuts:6PCS

(P) Screw Tube C1:3PCS
Screw Tube C2:3PCS

