

**IMPORTANT SAFETY INSTRUCTIONS**

1. These instructions are provided for your safety. Read them carefully and completely before installing the wall sconce.
2. **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE CODES BY A QUALIFIED PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
3. This fixture requires two (2) E12-base bulbs, 40 W maximum per bulb (not included).
4. To reduce the risk of fire, do not exceed the maximum wattage shown on the fixture label.
5. Suitable for indoor, dry locations only.
6. Connect only to a grounded, 120 V single-phase branch circuit.
7. Keep the fixture, packaging, and small parts away from children.

WARNING:

- Turn off the electrical supply at the main circuit panel before installation. Verify that the power is off before touching any wiring. Do not restore power until the wall sconce is completely assembled and installed.
- To reduce the risk of fire, electric shock, or personal injury, turn off the wall sconce and allow it to cool before replacing a bulb. Do not touch a bulb while the fixture is on or look directly at a lit bulb.
- Keep flammable materials away from the bulbs.

PRE-ASSEMBLY:


- Remove all parts and hardware from the carton and protective packaging. Do not lift or support the wall sconce by its electrical wires.

TOOLS REQUIRED (NOT INCLUDED):

Phillips screwdriver, slotted screwdriver, wire strippers, slip-joint pliers, measuring tape, adjustable wrenches, and wire cutters.

WALL SCONCE INSTALLATION

A	Finials	2pcs
B	Mounting Plate	1pc
C	Wire Connectors	3pcs
D	Glass Shade	2pcs
E	Fixture Body	1pc
F	Mounting Screws	2pcs
G	Outer Ring	2pcs
H	Ground Screw	1pc

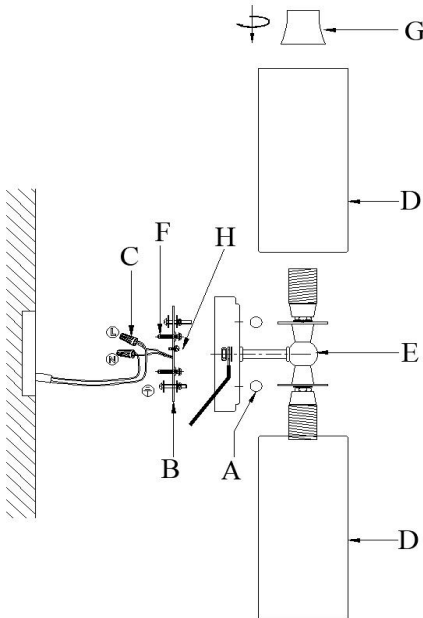

1. **Unpack the Fixture:** Carefully remove all parts from the carton and place them on a clean, soft surface to prevent damage.
2. **Turn Off Power:** Turn off the electrical supply at the main circuit panel and verify that the power is off.
3. **Remove the Mounting Plate:** Loosen Finials (A) on the Fixture Body (E), then remove Mounting Plate (B) from the fixture.
4. **Install the Mounting Plate:** Secure Mounting Plate (B) to the wall outlet box using the appropriate Mounting Screws (F). Ensure that the mounting plate is level and securely fastened.
5. **Prepare the Fixture Wires:** Carefully unwind the fixture wires. Trim excess wire while leaving sufficient length to reach the junction box. Strip approximately 5/8 in. (16 mm) of insulation from the end of each wire.
6. **Make the Electrical Connections:** Connect the fixture ground wire to the building ground wire using Wire Connector (C), and secure the ground connection to Ground Screw (H) on Mounting Plate (B).
 - Connect the fixture neutral wire, labeled "N," to the white building neutral wire using Wire Connector (C).
 - Connect the fixture hot wire, labeled "L," to the black building hot wire using Wire Connector (C).**CAUTION:** Do not reverse the hot and neutral connections.
7. **Complete the Wiring:** Confirm that all wire connectors are tight. Carefully place the conductors inside the junction box. Ensure that no wires are pinched or in contact with sharp edges.
8. **Attach the Fixture Body:** Carefully place the wires inside the outlet box. Position Fixture Body (E) over Mounting Plate (B), then secure it with Finials (A). Confirm that Fixture Body (E) is firmly attached, level, and flush against the wall.
9. **Install the Bulbs:** Install two (2) E12-base bulbs, 40 W maximum per bulb. Do not exceed the wattage shown on the fixture label. Keep the power off during installation.
10. **Install the Decorative Glass Shades:** Position the upper and lower Glass Shades (D) over the corresponding sockets on Fixture Body (E), as shown in the assembly diagram, then secure them with the two Outer Rings (G). Hand-tighten the outer rings only until the shades are secure. Do not overtighten.
11. **Final Inspection and Testing:** Confirm that all components are securely installed. Restore power at the fuse box or circuit breaker panel and test the fixture for proper operation.

Maintenance

- Disconnect electrical power before cleaning or servicing the fixture.
- Clean with a soft, dry cloth only.
- Periodically inspect the mounting plate, mounting screws, fixture body, and glass shades to confirm that they remain secure.
- Do not use abrasive cleaners, solvents, or chemical cleaning products.

INSTALLATION CHECKLIST:

- ☐ Outlet box is securely fastened and suitable for supporting the fixture weight.
- ☐ Mounting plate is securely installed
- ☐ Fixture body is securely mounted, level, and flush against the wall
- ☐ Electrical connections are complete and correctly matched
- ☐ Ground wire is connected
- ☐ Wire connectors are secure
- ☐ Wiring is safely placed inside the junction box without pinching
- ☐ All decorative glass shades are securely installed
- ☐ Fixture has been tested and operates correctly