



IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the chandelier.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HARZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from **4x 60watt Max E12** standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. **DRY LOCATION ONLY.** It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- **Keep it away from children.**

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your chandelier is fully assembled and installed.
 - To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool
- Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. **Do not** discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

- 1.Remove all parts from package and all plastic covering.
- 2.Attach the connect rod A (H) to the cluster and fasten it.
- 3.Put the connect rod A (H) pass through the middle hole of metal ring A (I), and lock it with connect rod B (K).
- 4.Put the connect rod B (K) pass through the middle hole of metal ring B (L),and lock it with finial(M).
- 5.Hang the tassel (N) on the finial (M).
- 6.Gently pull the wiring from the outlet box and allow wires to hang.
- 7.Carefully inspect the fixture's wires. The **NEUTURAL FIXTURE WIRE** is marked with 'N'. The **Hot FIXTURE WIRE** is marked 'L'. The unmarked **GREEN** wire is **GROUND WIRE**.
- 8.Attach the **GROUND WIRE** from the fixture to the **GROUND JUNCTION BOX WIRE** from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet box **DOES NOT** have a **GROUND WIRE**, be sure to insert the Mounting Screw (C) into the mounting Bar (B) facing **DOWN**. Wrap the fixture's **GROUND WIRE** around the ground screw. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME IS PROPERLY GROUNDED.**
- 9.Connect the **NEUTRAL FIXTURE WIRE** to the **NEUTRAL JUNCTION BOX WIRE** (white). Fasten each together with a wire connector (A) and wrap the connection with electrical tape. Be sure no wire strands are exposed.
- 10.Connect the **HOT FIXTURE WIRE** to The **HOT JUNCTION BOX WIRE** (black). Fasten each together with a wire connector (A). Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- 11.Gently tuck the wire connection neatly into the ceiling junction box
- 12.Move the lamp body to the ceiling, and affix it to the mounting bar with nuts (2).
- 13.Install the bulb (Bulbs not included).


PARTS ENCLOSED:

- (A)Wire Connectors (3)
- (B) Mounting Bar (1)
- (C) Mounting screw (3)
- (D)Mounting screw (3)
- (E) Body (1)
- (F) Nut (2)
- (G)Wood bead strand A (42)
- (H)Connect Rod A (1)
- (I) Metal Ring A (1)
- (J) Wood bead strand B (21)
- (K) Connect Rod B (1)
- (L)Metal Ring A (1)
- (M) Finial (1)
- (N) Tassel (1)
- (O) Wood bead strand C (7)
- (P) Wood bead strand D (7)

TOOLS REQUIRED:

- **Philips screwdriver**
- **Electrical tape**
- **Wire cutters**

MODEL: F22114-4W

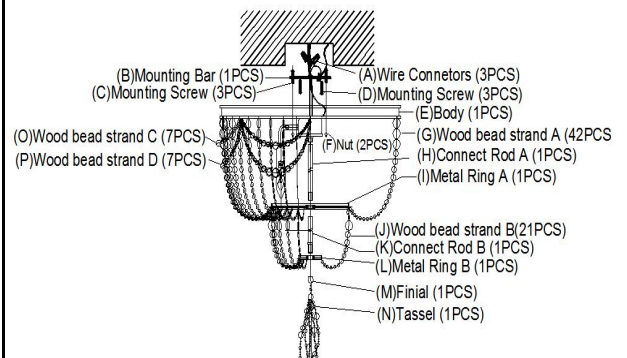

CARE INSTRUCTIONS:

1. **Make sure that power is turned off and bulb has cooled before handling.**
2. **Wipe clean with a dry cloth/mid soapy solution. Do not use corrosive cleaners.**
3. **The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.**