


PARTS ENCLOSED

- A. Nut Connector(3)
- B. Mounting Screws(3)
- C. Mounting Plate(1)
- D. Canopy(1)
- E. Stop screws(5)
- F. Workpiece(4)

- G. Cable Line(5)
- H. Screw(15)
- I. Acrylic sheet (5)
- J. Bracket(5)
- K. Glass shade(5)
- L. Lamp Cup(5)
- M. Net cover(5)

- N. outer ring(5)
- O. Explosive screws(4)

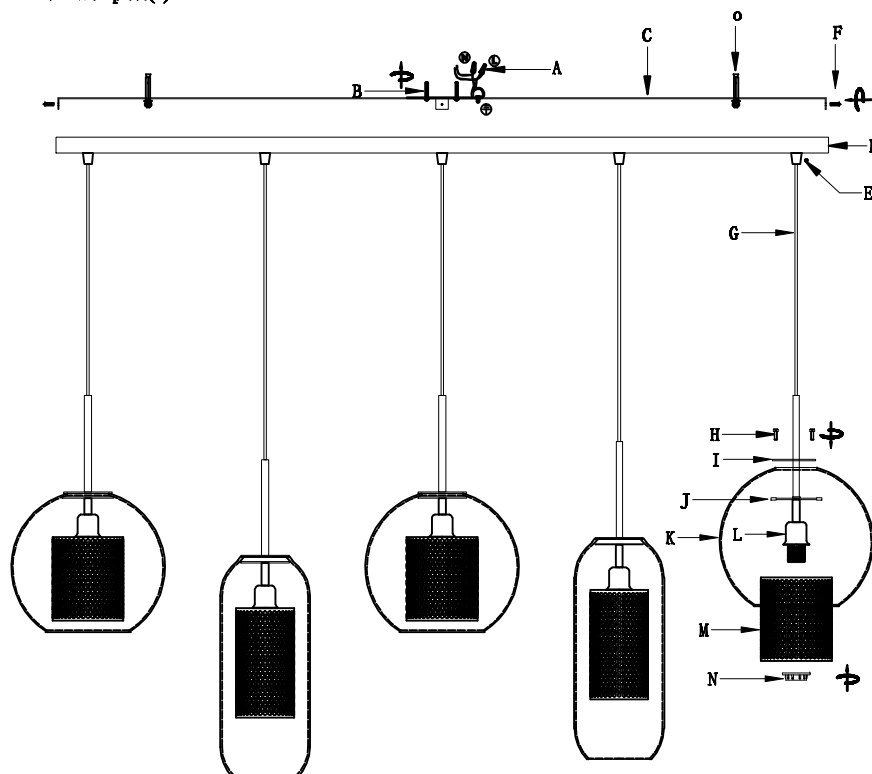

KCH1116-5

Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Remove Mounting Plate (C) from Canopy (D) by removing Canopy screw (F)
3. Attach Mounting Plate (C) to the ceiling and secure with Mounting Screws (B) and use 4 additional fasteners to enforce the ceiling attachment .Based on the ceiling structure,please find the proper from your local hardware store.
4. Based on the ceiling height, if needed, reconfigure the suspension height by adjusting cable (G)lengths - see HEIGHT ADJUSTMENT INSTUC on page 3
5. Fine-tune the suspension height of each cable (G), lock each suspension cable by tightening the Stop screws (E) with an Allen Screwdriver
6. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
7. Carefully inspect the wires of the lighting fixtures. The neutral fixed wire is marked with "N". The hot fixture line is marked as "L". The unmarked green line is the ground wire.
8. Connect the bare copper ground wire of the lamp to the ground wire (usually yellow green), the neutral wire to the neutral wire (usually white), and the hot fixture line to the hot wire (usually black), and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED**
10. Attach Canopy (D) with the fixture to the affixed Mounting Plate (C) and secure with Canopy screw (F)
11. Insert E12 Bulbs into each of the sockets.
12. Screw up the workpiece (F) and fix the top suction plate (D) on the ceiling.
13. Carefully thread the Lampshade (K) from bottom to top through the Lamp Cup (L) and bracket (J) , and then screw (H) through the hole in the acrylic sheet (I) to the bracket (J) to secure the Lamp shade (K) to the bracket (J) .
14. Screw the outer ring (N) of the lamp holder to the lamp holder and fasten the net cover (M).
15. Install the bulbs on the sockets.
16. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents