

**IMPORTANT SAFETY INSTRUCTIONS**

1. These instructions are provided for your safety. Read them carefully and completely before installing the flush-mount fixture.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE CODES BY A QUALIFIED PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. This fixture requires six (6) E12-base bulbs, 40 W maximum per bulb (not included).
4. To reduce the risk of fire, do not exceed the maximum wattage shown on the fixture label.
5. Suitable for indoor, dry locations only.
6. Connect only to a grounded, 120 V single-phase branch circuit.
7. Keep the fixture, packaging, and small parts away from children.

WARNING:

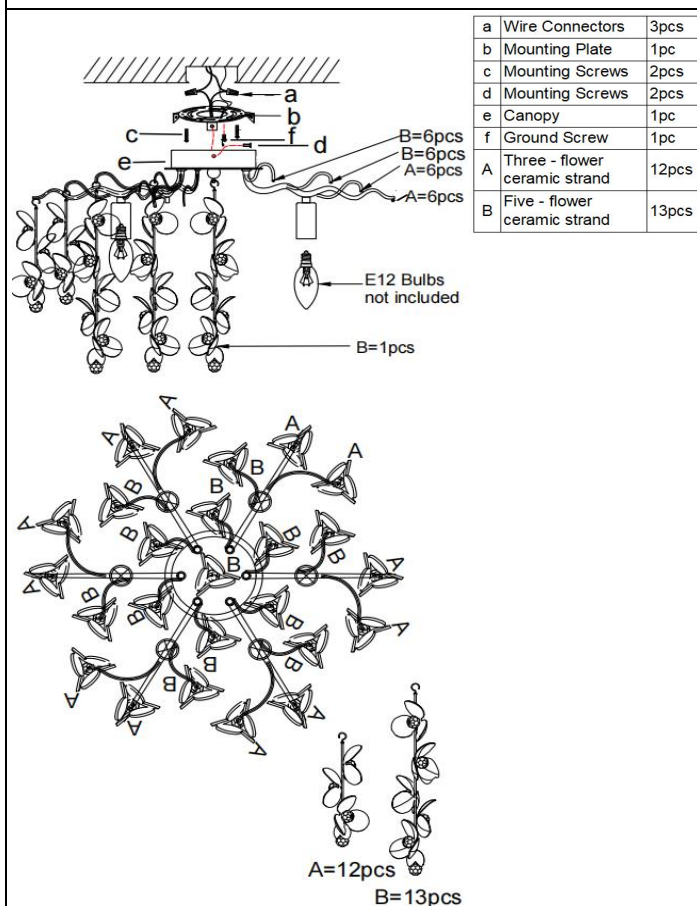
- Turn off the electrical supply at the main circuit panel before installation. Verify that the power is off before touching any wiring. Do not restore power until the flush mount is completely assembled and installed.
- To reduce the risk of fire, electric shock, or personal injury, turn off the flush mount and allow it to cool before replacing a bulb. Do not touch a bulb while the fixture is on or look directly at a lit bulb.
- Keep flammable materials away from the bulbs.

PRE-ASSEMBLY:

- Remove all parts and hardware from the carton and protective packaging. Do not discard any contents until installation is complete.
- Due to the fixture's size and weight, a minimum of two qualified installers and an appropriate lifting device are required. Do not lift or support the flush mount by its electrical wires.

TOOLS REQUIRED (NOT INCLUDED):

Phillips screwdriver, slotted screwdriver, wire strippers, slip-joint pliers, measuring tape, adjustable wrenches, and wire cutters.

FLUSH-MOUNT INSTALLATION

1. **Unpack the Fixture:** Carefully remove all parts from the carton and place them on a clean, soft surface to prevent damage.
2. **Turn Off Power:** Turn off the electrical supply at the main circuit panel and verify that the power is off.
3. **Prepare the Mounting System:** Remove the Mounting Screws (d) and separate Canopy (e) from Mounting Plate (b). Secure Mounting Plate (b) to a listed outlet box using the two Mounting Screws (c). Ensure that the outlet box is securely fastened and suitable for supporting the fixture weight. If the outlet box is not adequately rated, secure the mounting plate directly to the building structure using suitable hardware.
4. **Prepare the Fixture Wires:** Carefully unwind the fixture wires. Trim excess wire while leaving sufficient length to reach the junction box. Strip approximately 5/8 in. (16 mm) of insulation from the end of each wire.
5. **Make the Electrical Connections:** Connect the fixture ground wire (bare copper or green) to the building ground wire with the supplied wire connector. Properly bond Mounting Plate (b) using Ground Screw (f), as required.
 - Connect the fixture neutral wire, labeled "N," to the white building neutral wire.
 - Connect the fixture hot wire, labeled "L," to the black building hot wire.CAUTION: Do not reverse the hot and neutral connections.
6. **Complete the Wiring:** Confirm that all wire connectors are tight. Carefully place the conductors inside the junction box. Ensure that no wires are pinched or in contact with sharp edges.
7. **Install the Canopy:** Raise Canopy (e) to the ceiling and secure it to Mounting Plate (b) by tightening Mounting Screws (d). Confirm that the canopy sits flush against the ceiling.
8. **Level and Inspect the Fixture:** Confirm that the fixture is level and Canopy (e) sits flush against the ceiling. Verify that all screws and mounting hardware are securely fastened.
9. **Install the Ceramic Flower Strands:** Install the twelve (12) Three-flower Ceramic Strands (A), and thirteen (13) Five-flower Ceramic Strands (B) on the Fixture Body as shown in the diagram. Beginning with one B strand at the center underside, then work outward in the following sequence: 6 B → 6 B → 6 A → 6 A.
10. **Install the Bulbs:** Install six (6) E12-base bulbs, 40 W maximum per bulb. Do not exceed the wattage shown on the fixture label. Keep the power off during installation.
11. **Final Inspection and Testing:** Confirm that ceramic flower strands are securely installed, all tools and packaging have been removed, and no wires are exposed or pinched. Restore power and test the fixture.

Maintenance

- Disconnect electrical power before cleaning or servicing the fixture.
- Clean with a soft, dry cloth only.
- Periodically inspect the canopy, screws, and mounting hardware to confirm that they remain secure.
- Do not use abrasive cleaners, solvents, or chemical cleaning products.

INSTALLATION CHECKLIST:

- ☐ Outlet box and structural support system are securely fastened and rated for the full fixture load
- ☐ Mounting plate is securely installed
- ☐ Canopy, screws, and mounting hardware are securely tightened
- ☐ Fixture is level and securely mounted
- ☐ Electrical connections are complete and correctly matched
- ☐ Ground wire is connected
- ☐ Wire connectors are secure
- ☐ Wiring is safely placed inside the junction box without pinching
- ☐ Canopy is installed flush against the ceiling
- ☐ All ceramic flower strands are securely installed and hang naturally.
- ☐ Fixture has been tested and operates correctly