



IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the chandelier.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from **8x 40watt Max E12** standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. **DRY LOCATION ONLY.** It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- **Keep it away from children.**

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your chandelier is fully assembled and installed.
 - To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool
- Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. **Do not** discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

- 1.Remove all parts from package and all plastic covering.
 - 2.Fasten collar loop(G) on the Hardware (H).
 - 3.Attach the Connecting pole (J) to the Hardware (H) and Cluster (M).
 - 4.Attach the Small Chains (I) to the Hardware (H) and Body (L) by Links (K).
 - 5.Unlock Link loop (F) and attach to the Collar loop (G).
 - 6.Gently pull the wiring from the outlet box and allow wires to hang.
 - 7.Carefully inspect the fixture's wires. The **NEUTRAL FIXTURE WIRE** is marked with 'N'. The **Hot FIXTURE WIRE** is marked 'L'. The unmarked **GREEN** wire is **GROUND WIRE**.
 - 8.Attach the **GROUND WIRE** from the fixture to the **GROUND JUNCTION BOX WIRE** from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet box **DOES NOT** have a **GROUND WIRE**, be sure to insert the Green Ground Screw (D) into the mounting Bar (B) facing **DOWN**. Wrap the fixture's GROUND WIRE around the ground screw. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME IS PROPERLY GROUNDED.**
 - 9.Connect the **NEUTRAL FIXTURE WIRE** to the **NEUTRAL JUNCTION BOX WIRE** (white). Fasten each together with a wire connector (A) and wrap the connection with electrical tape. Be sure no wire strands are exposed.
 - 10.Connect the **HOT FIXTURE WIRE** to The **HOT JUNCTION BOX WIRE** (black). Fasten each together with a wire connector (A). Be sure no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
 - 11.Gently tuck the wire connection neatly into the ceiling junction box.
 - 12.Move the canopy (E) up to the ceiling, and affix it with the ring knob on the chain.
- Ensure that it is the chain and not the power cord that is supporting the fixture's weight.
- 13.Install the bulb (Bulbs not included).
 - 14.Hang the Glasses (P) on the Body (L) in the sequence of layers 1.2.3.4.5.6 showing on Page 2.


PARTS ENCLOSED:

- (A)Wire Connectors (3)
- (B) Mounting Bar (1)
- (C) Mounting screw (3)
- (D)Green Ground Screw (1)
- (E)Canopy & Chain (1)
- (F) Link Loop (2)
- (G)Collar Loop (1)
- (H)Hardware (1)
- (I)Small Chain (4)
- (J)Connecting Pole (1)
- (K)Link (8)
- (L) Body (1)
- (M) Cluster (1)
- (N) Socket (8)
- (P) Glass (71)

TOOLS REQUIRED:

- **Philips screwdriver**
- **Electrical tape**
- **Wire cutters**

MODEL: H23101RL-8

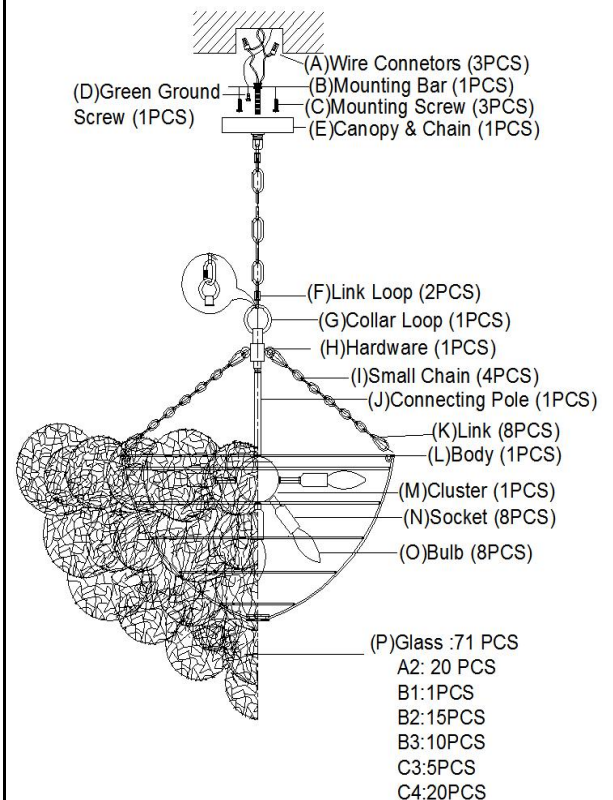

CARE INSTRUCTIONS:

1. **Make sure that power is turned off and bulb has cooled before handling.**
2. **Wipe clean with a dry cloth/mild soapy solution. Do not use corrosive cleaners.**
3. **The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.**

2 hooks



A2: 20PCS

1 hook



B1: 1PCS

2 hooks




B2: 15PCS

2 hooks + 5 chain knots




B3: 10PCS

2 hooks + 5 chain knots





C3: 5PCS

2 hooks + 11 chain knots



C4: 20PCS

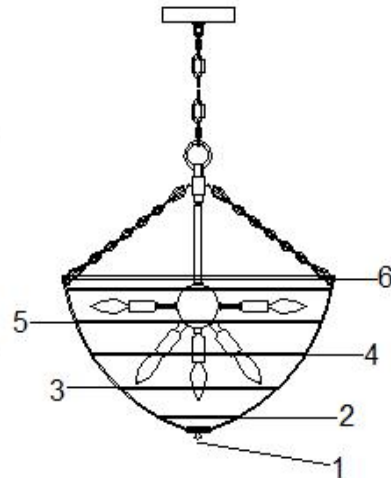

The hanging starting point for each layer of glass

