

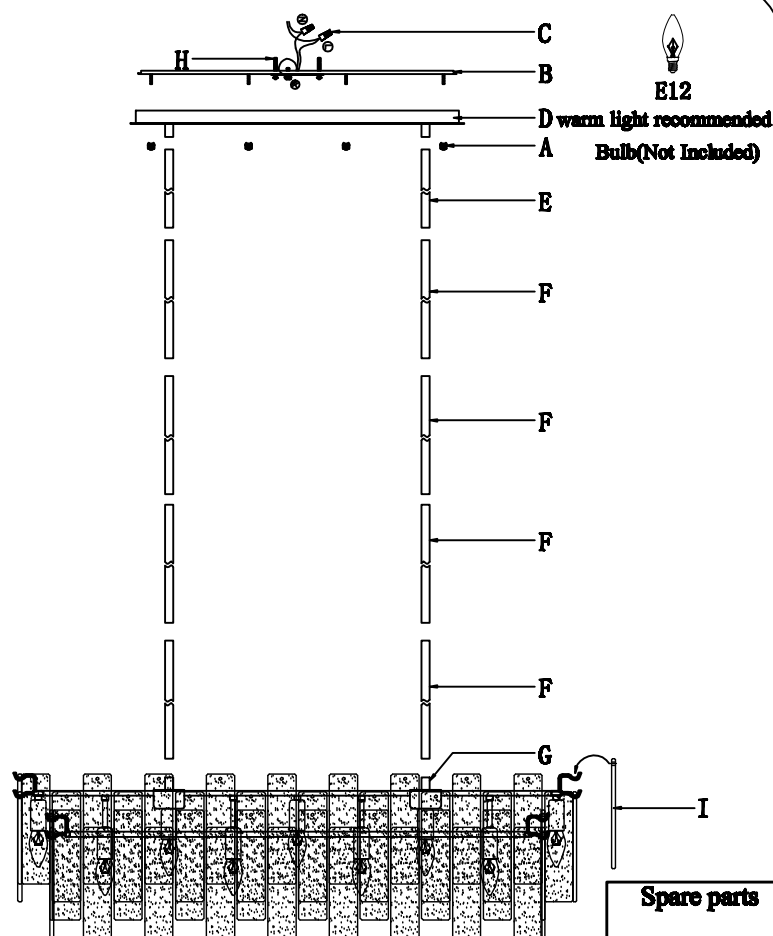






H24107L-9

Spare parts



Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

1. Carefully remove all parts from the box
2. Remove the mounting bracket (B) from the canopy (D) by loosening the screws (A)
3. According to the height you need to decide how many rods (E) / (F) needed, and then put the cable through the rods till through the canopy (D) when install the rods (E) / (F) on the screw nipple (G).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF
5. Affix the mounting bracket (B) with screws (H) on the outlet box
6. Wrap both safety cables with nipples (C), push the cable into the outlet box.
7. Attach the canopy (D) to the mounting bracket (B) and secure with screws (A)
8. Install the bulbs (NOT INCLUDING) on the sockets.
9. Install glass (I) on the lamp body according to the illustration.
10. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

