


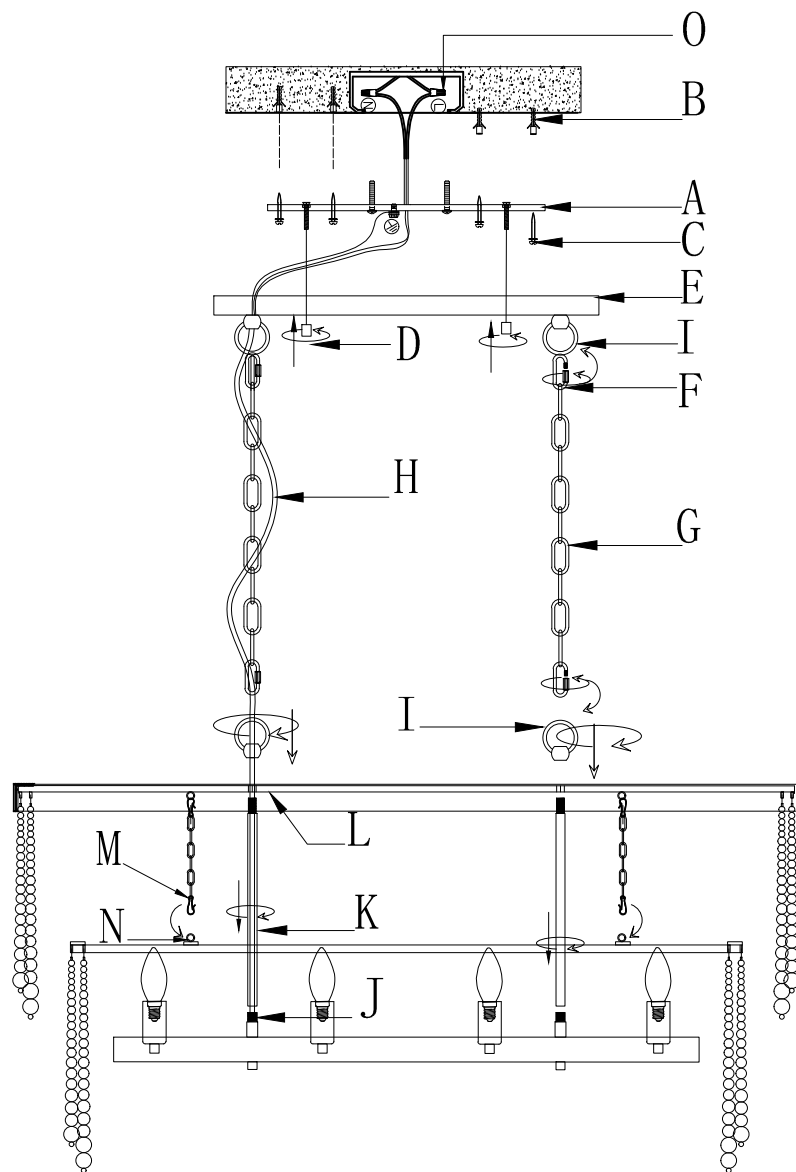

H25120L-8

Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

1. Take the mounting bracket (A) from the square box (E). Then inset the expansion tubes (B) to the ceiling holes and then fix the bracket with screws (C) to the ceiling.
2. Take out two round tubes (K) and screw the round tubes (K) into the threaded pipe (J). Thread the wire (H) through one of the round tubes.
3. Place the frame (L) onto the round tube (K), then tighten them with the rings (I). Note: The directions of the two rings (I) should be adjusted to be the same, as shown in the figure.
4. Take out two chains (G) and adjust the length of the chains according to the actual height. Then thread the wire (H) through one of the chains every three links and pass it through the square box (E).
5. Fasten the chains into the rings (I) using the locking rings (F) at both ends of the chains and lock them tightly.
6. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
7. Wrap both safety cable with nipples (O), push the cable into the outlet box.
8. Install the square box (E) on the bracket (A) and tighten it with the iron stud nuts (D).
9. Insert the four elastic buckles (M) into the corresponding circles (N) respectively.
10. Install the light bulb on the lamp holder.
11. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

