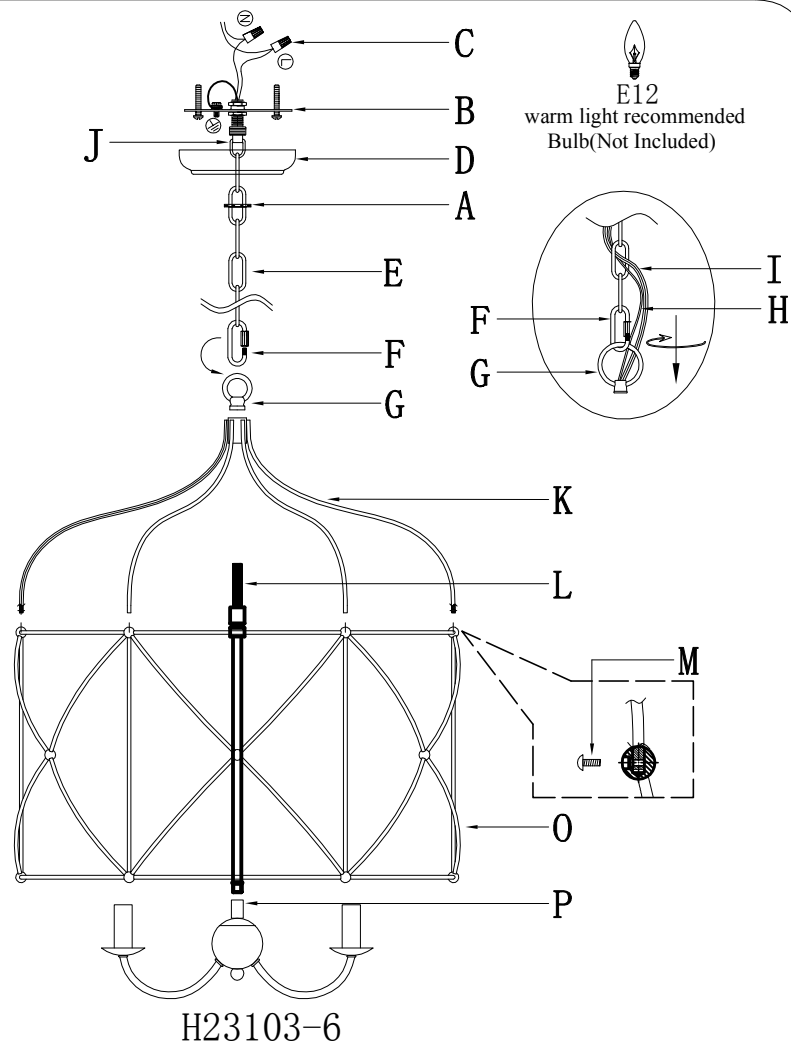


Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

1. Carefully remove all parts from the box.
2. Place the iron wire frame (K) into the ball of iron wire frame (O) and affix with the screw (M) according to the illustration.
3. Put the cable through the rod (L) when install the rod (L) into the lamp body (P). then Place the iron wire frame (K) (O) on the screw nipple of the rod (L) and affix with the loop (G) according to the illustration.
4. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
5. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain (E) as needed using a pair of chain pliers.
6. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
7. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF
8. Affix the mounting bracket (B) on the outlet box
9. Wrap both safety cable with nipples (C), push the cable into the outlet box.
10. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
11. Install the bulbs (NOT INCLUDING) on the sockets.
12. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

