



TERRACOTTA
DESIGNS

INSTALLATION INSTRUCTIONS

MODEL: W8250-2

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing the wall sconce.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HARZARDS INVOLVED.**
- We strongly recommend that an authorized and certified electrician install all direct wire fixtures.
- This fixture has been rated from 2 x 60watt B standard bulb(not included).To avoid the risk of fire, do not exceed the recommended wattage.
- The light fixture is meant for indoor use. **DRY LOCATION ONLY**. It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
- Keep it away from children.

WARNING:

- Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off the Sconce and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.

PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

TO ASSEMBLY:

SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

1. Carefully unpack all parts and hardware and lay out on a clear workspace
2. Attach the back plate (B) to the outlet box by inserting the mounting screw (C) as supplied.
3. Feed the supply wires through the outlet box and attach the junction box wires with wire connectors (A) and wrap the connection with electrical tape .The Black Supply wire attaches to the parallel LIVE cord (round smooth) and the white supply wire attaches to the parallel NEUTRAL cord (square ridged) .Connect the ground wire from the fixture to the electrical supply ground wire.
4. Connect the Body (E) to the back plate (B),by using the nuts (D).
5. Install the bulb (Bulbs not included).


PARTS ENCLOSED:

- (A) Wire Connectors (3)
- (B)Back Plate (1)
- (C)Mounting screw(4)
- (D) Nuts (2)
- (E)Body (1)
- (F) Arms (2)

TOOLS REQUIRED:

- Philips screwdriver
- Electrical tape
- Wire cutters

MODEL: W8250-2

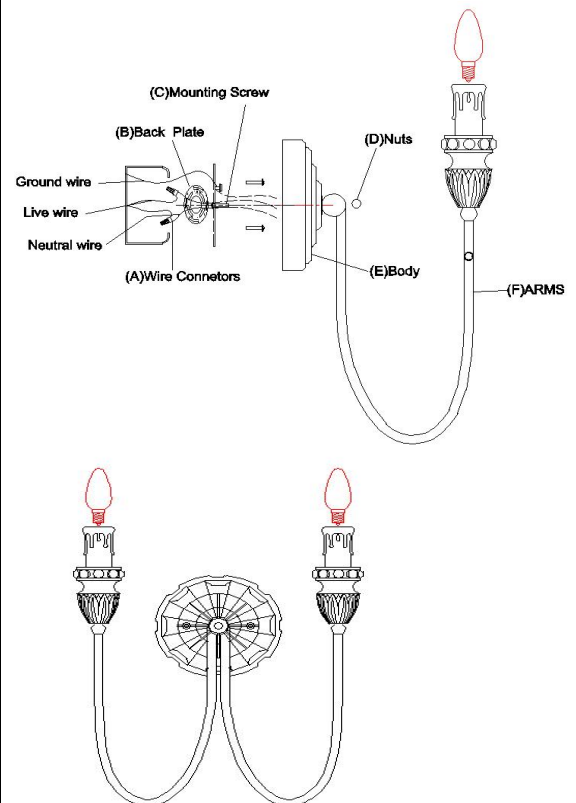

CARE INSTRUCTIONS:

1. Make sure that power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth/mid soapy solution. Do not use corrosive cleaners.
3. The cable/cord of the chandelier cannot be replaced. If the cable is damaged, do not use the light.