



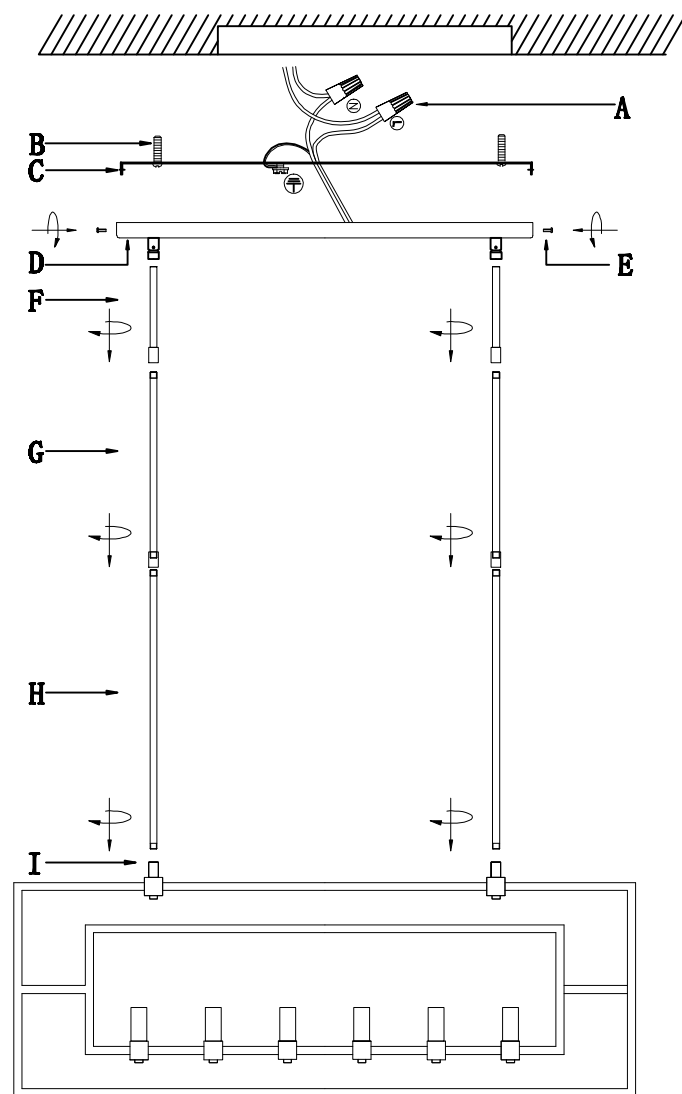


**H6123-6AG**

**F**



**G**



**H**



## Assembly Instructions

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**  
**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

1. Carefully remove all parts from the box
2. Remove the mounting bracket (C) from the rectangular canopy (D) by loosening the screws (E)
3. According the height you need to decide how many rods (F)/(G) /(H) needed, and then put the cable through the rods till through the canopy (D) when install the rods (F)/(G) /(H) on the screw nipple (I).
4. **INSURE THE ELECTRICITY SUPPLY IS TURNED OFF**
5. Affix the mounting bracket (C) on the outlet box with screws (B).
6. Hold the lamp body and wrap both safety cables with nipples ( A), push the cable into the outlet box.
7. Attach the rectangular canopy (D) to the mounting bracket (C) and secure with the side screws (E) again.
8. Install the bulbs on the sockets
9. Installation is complete, turn on power at fuse or circuit breaker.

**\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents\*\*\***

