

IMPORTANT SAFETY INSTRUCTIONS

- These instructions are provided for your safety. Read them carefully and completely before installing the chandelier.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE CODES BY A QUALIFIED PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- This fixture requires thirteen (13) E12-base bulbs, 40 W maximum per bulb (not included).
- To reduce the risk of fire, do not exceed the maximum wattage shown on the fixture label.
- Suitable for indoor, dry locations only.
- Connect only to a grounded, 120 V single-phase branch circuit.
- Keep the fixture, packaging, and small parts away from children.

WARNING:

- Turn off the electrical supply at the main circuit panel before installation. Verify that the power is off before touching any wiring. Do not restore power until the chandelier is completely assembled and installed.
- To reduce the risk of fire, electric shock, or personal injury, turn off the chandelier and allow it to cool before replacing a bulb. Do not touch a bulb while the fixture is on or look directly at a lit bulb.
- Keep flammable materials away from the bulbs.

PRE-ASSEMBLY:


- Remove all parts and hardware from the carton and protective packaging. Do not discard any contents until installation is complete.
- Due to the fixture's size and weight, a minimum of two qualified installers and an appropriate lifting device are required. Do not lift or suspend the chandelier by its electrical wires or safety steel cable.

TOOLS REQUIRED (NOT INCLUDED):

Phillips screwdriver, slotted screwdriver, wire strippers, slip-joint pliers, measuring tape, adjustable wrenches, and wire cutters.

CHANDELIER INSTALLATION

A Screws	4pcs
B Mounting Plate	1pc
C Wire Connectors	3pcs
D Canopy	1pc
E Ground Screw	1pc
F Mounting Screws	2pcs
G Rod (6")	6pcs
H Rod (12")	6pcs
I Rod (18")	2pcs
J Nipple	4pcs
K Glass (116pcs+3pcs spare)	119pcs
L Safety Steel Cable	1pc
M Cable Lock	4pcs

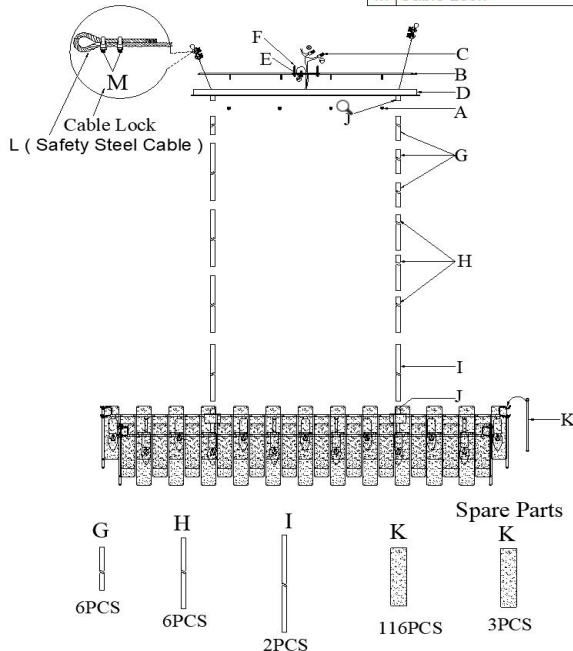

- Unpack and Inspect the Fixture:** Carefully remove all parts and place them on a clean, padded surface. Confirm that all components are present before discarding any packaging.
- Turn off Electrical Power:** Switch off power to the installation location at the main circuit panel. Verify that the circuit is de-energized before proceeding.
- Adjust the Hanging Height and Route the Wires:** Select Rods (G), (H) and (I) as needed to obtain the desired hanging height. Carefully pass the fixture wires and safety steel cable (L) through the selected connecting rods before assembling the rods. Do not twist, pinch or damage the wires.
- Assemble the Suspension Rods:** Assemble two identical rod sets using the selected Rods (G), (H), and (I). For each rod set, securely thread the lower end onto the lower Nipple (J) and the upper end onto the upper Nipple (J) at the canopy assembly. Ensure that both rod sets are equal in length. Support the fixture at all times; do not suspend it from the wires or safety steel cable.
- Prepare the Mounting System:** Remove the Mounting Plate (B) from the Canopy (D) by loosening Screws (A). Secure the mounting plate to a listed outlet box and structural support system rated for the full fixture load, using the designated Mounting Screws (F).
- Install the Safety Steel Cable:** Secure one end of Safety Steel Cable (L) to the designated fixture anchor point using two Cable Locks (M). Loop the opposite end around an approved structural ceiling member and secure it with the remaining two Cable Locks (M). Tighten all cable locks securely and leave only slight slack. Do not attach the safety steel cable to the junction box, mounting plate, or electrical wiring.
- Prepare the fixture wires:** After confirming the final hanging height, trim excess wire while leaving enough length to make the electrical connections. Strip approximately 5/8 in. (16 mm) of insulation from each wire end.
- Make the electrical connections:** Connect ground to ground, neutral "N" to the white building wire, and hot "L" to the black building wire. Properly bond the mounting plate using Ground Screw (E), as required. Do not reverse the hot and neutral connections.
- Complete the canopy installation:** Confirm that all wire connectors are secure. Carefully tuck the wires into the junction box without pinching them. Raise the Canopy (D) and secure it to the Mounting Plate (B) by tightening Screws (A). Confirm that the canopy sits flush against the ceiling.
- Level and inspect the fixture:** Confirm that the fixture hangs straight and level. Verify that all rods, nipples, threaded connections, mounting hardware, cable locks, and safety steel cable connections are securely fastened.
- Install the bulbs:** Install thirteen (13) E12-base bulbs, 40 W maximum per bulb. Do not exceed the wattage shown on the fixture label. Keep the power off during installation.
- Install the Decorative Glass Pieces:** Beginning at the lowest level of the fixture, install each of the 116 Decorative Glass Pieces (K) as shown in the assembly diagram. Continue upward until all glass pieces have been installed.
- Final inspection and testing:** Confirm that all glass pieces are securely installed and evenly spaced, all tools and packaging have been removed, and no wires are exposed or pinched. Restore power and test the fixture.

Maintenance

- Disconnect power before cleaning.
- Clean with a soft dry cloth only.
- Periodically inspect rods, screws, nipples, and mounting hardware to ensure they remain secure.
- Do not use abrasive cleaners or solvents.

INSTALLATION CHECKLIST:

- ☐ Outlet box and structural support system are securely fastened and rated for the full fixture load.
- ☐ Mounting plate is securely installed
- ☐ Suspension rods, nipples, threaded connections, cable locks, and mounting hardware are securely tightened.
- ☐ Fixture hangs straight and level
- ☐ Electrical connections are complete and correctly matched
- ☐ Ground wire is connected
- ☐ Safety steel cable is securely attached to an approved structural support with only slight slack
- ☐ Wire connectors are secure
- ☐ Wiring is safely placed inside the junction box without pinching
- ☐ Canopy is installed flush against the ceiling
- ☐ All decorative glass pieces are securely installed
- ☐ Fixture has been tested and operates correctly

Safety Cable Installation

Install Safety Steel Cable:

1. Secure one end of Safety Steel Cable (L) to the designated fixture anchor point using two Cable Locks (M).
2. Loop the opposite end around an approved structural ceiling member and secure it with the remaining two Cable Locks (M).
The structural support must be capable of supporting at least five (5) times the fixture weight.
3. Ensure the cable is properly tensioned with only slight slack.
4. Never attach the safety steel cable to the mounting plate, electrical box, electrical wiring, or primary suspension hardware.
5. Verify the safety cable is securely fastened before completing the installation.



IMPORTANT NOTES

- The safety cable must be attached to a solid structural member that is independent of the electrical junction box.
- The safety cable must be rated to support at least 5 times the weight of the fixture.
- Do not remove or bypass the safety cable.
- For indoor use only.

ACCEPTABLE CEILING ATTACHMENT EXAMPLES



Wood Joist
(Use Screw Eye)



Concrete Ceiling
(Use Expansion Anchor
with Screw Eye)



Steel Beam
(Use Beam Clamp
with Eye Bolt)



Do NOT attach to
junction box



WARNING: Failure to install the safety cable as instructed may result in serious injury or death, and/or property damage.

WARNING:

The safety steel cable is intended as a secondary safety restraint only. It does not replace the primary fixture support. The chandelier must be securely supported by the connecting rods and ceiling-mounting system attached to a structure capable of supporting at least five (5) times the weight of the fixture.