


PARTS ENCLOSED

- (A) Nut Connector(3)
- (B) Mounting Screws(2)
- (C) Mounting Plate(1)
- (D) Canopy(1)
- (E) Parts(1)
- (F) Rods a(1)
- (G) Rods b(1)
- (H) Rods c(2)
- (I) Meter Screws(4)
- (J) Lamp Body(1)
- (K) Glass Shades(15)

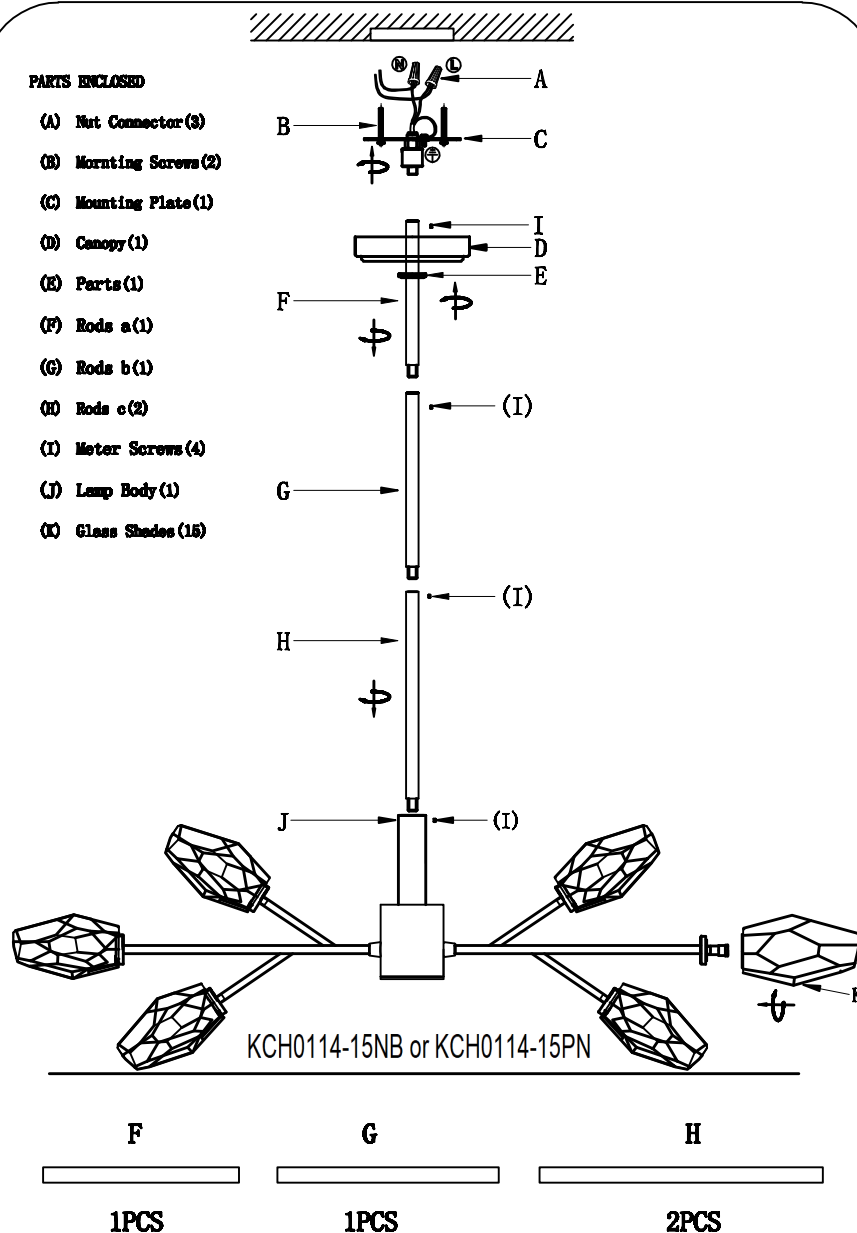

Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

1. Carefully remove all parts from the box.
2. According the height you need to decide how many rods (F) / (G) / (H) needed, and then put the cable through the rods till through the canopy (D) and the mounting bracket (C) when install the rods (F) / (G) / (H) on the Lamp Body (J).
3. Tighten the meter screws(I) in the corresponding position.
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (C) on the outlet box with screws (B).
6. After the cable is passed through the screw tube in the middle of the mounting bracket, fix the lamp body on the mounting bracket.
7. Wrap both safety cables with nipples (A), push the cable into the outlet box.
8. Push the circular canopy (D) up over the mounting bracket (C) and secure with the Parts (E).
9. Install the bulbs on the sockets.
10. Place the lamp shade (K) on the lamp.
11. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

