


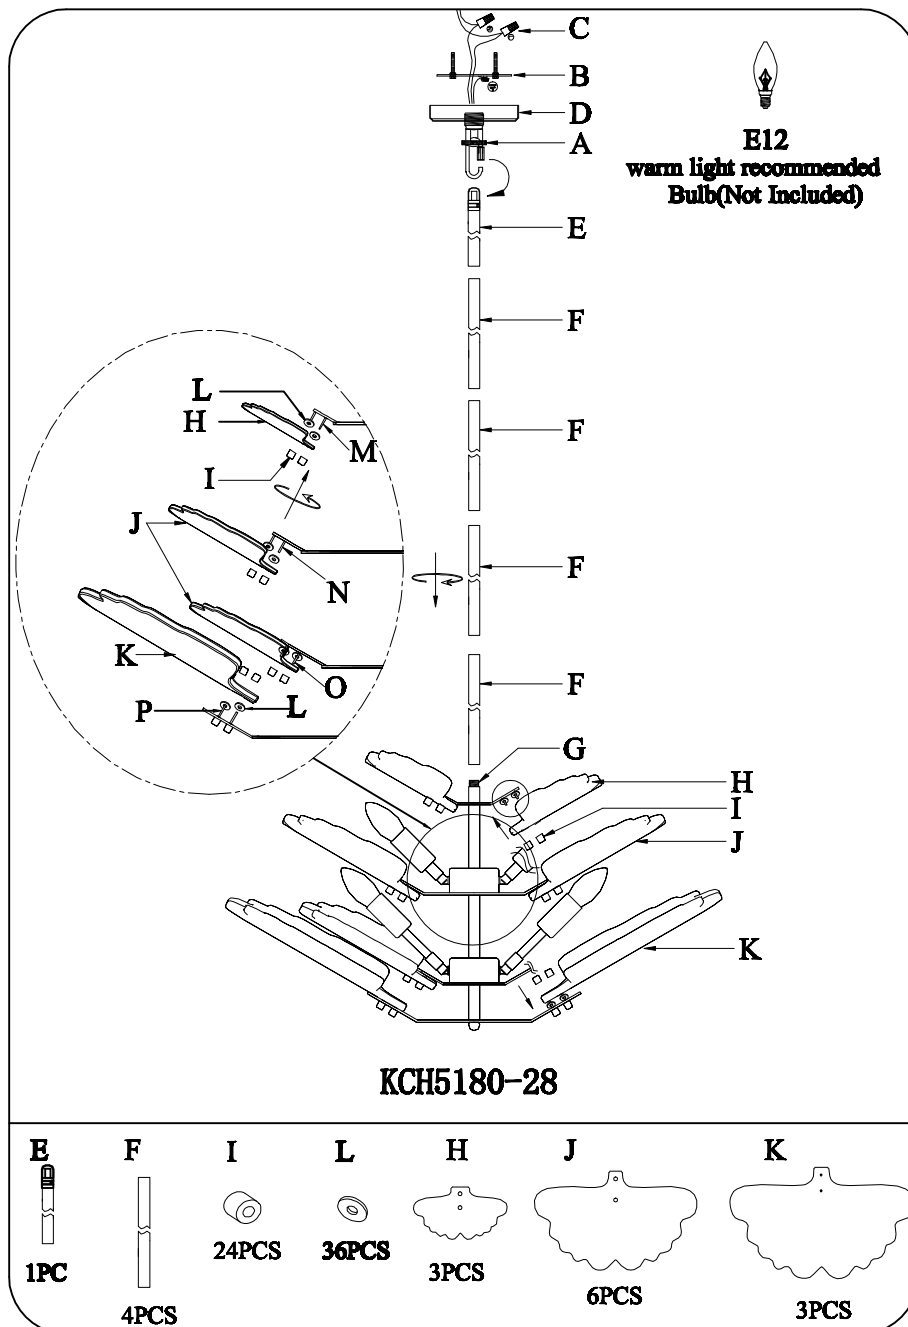

Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

1. Carefully remove all parts from the box
2. Remove the mounting bracket (B) from the canopy (D) by loosening the collar ring (A)
3. Link the tubes (E) (F) together (you need link them according the height you want) and thread the linked pipe to the fixture body screw nipple (G) with putting the cables through the linked pipe till the canopy (D) as well.
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF
5. Affix the mounting bracket (B) on the outlet box
6. Wrap both safety cables with nipples (C), push the cable into the outlet box.
7. Attach the canopy (D) to the mounting bracket (B) and secure with collar ring (A).
8. Install the bulbs (NOT INCLUDING) on the sockets
9. Starting from the top as shown in the illustration, first use the plastic washer (L) and screw (I) to secure the glass (H) at the frame point (M). Then use the washer (L) and screw (I) again to secure the glass (J) to the frame points (N) and (O). Finally, use the screw (I) again to secure the glass (K) to the frame point (P). (USE ONE MOER SPARE WASHER TO FIX THE GLASS IF THE GLASS IS NOT SO FIRM WITH ONE WASHER)
10. Installation is complete, turn on power at fuse or circuit breaker.

*****Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents*****

