


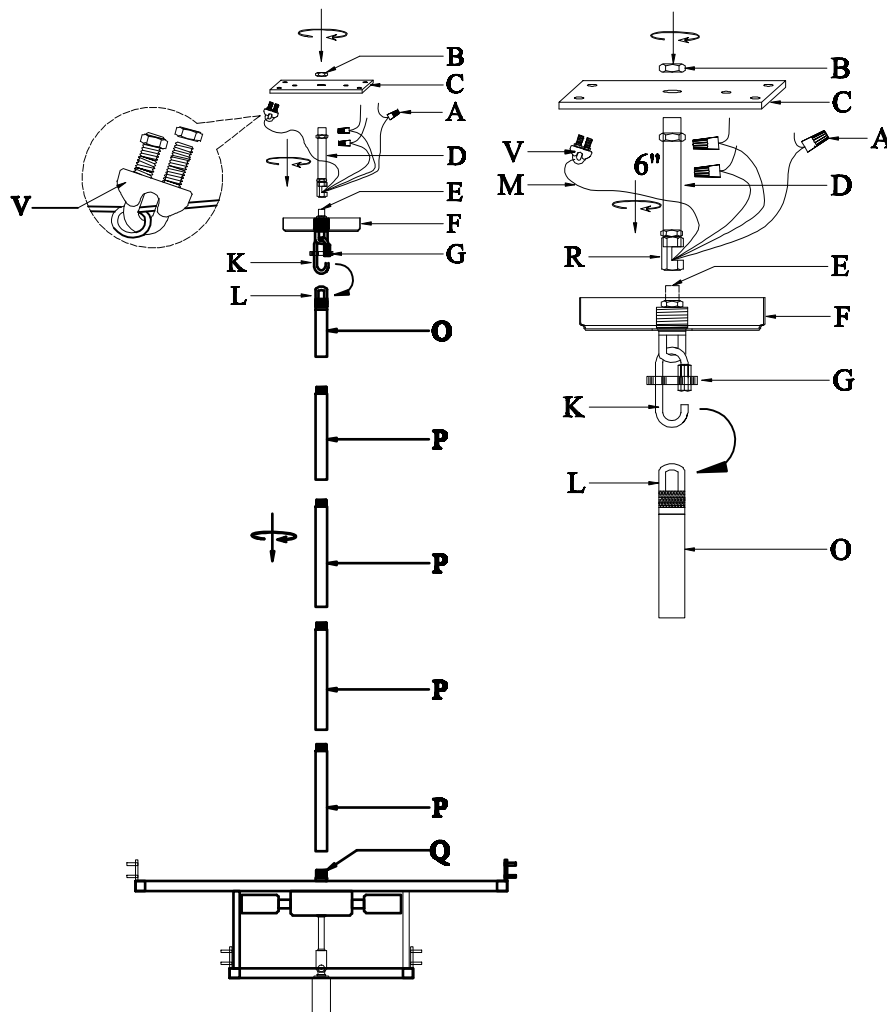

KCH5130-29


Assembly Instructions


WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

***** THIS IS A HEAVY CHANDELIER OVER 50 POUNDS *****

1. Carefully remove all parts from the box
2. Fix the rod part (D) on the backer plate (C) with lock nut (B) (If not long enough, link the extension rods (S) (T) (U) with coupler (R) and lock nuts (B)) and then install the collar loop part (E) on the rod part (D) firmly according to the illustration.
3. Then fix the whole backer plate part to the wooden keel, concrete or steel ceiling structure frame firmly.
4. Take off the collar ring (G) from the collar loop (E).
5. According to the height you need to decide how many rods (O)/(P) needed, and then put the cables and safety cable through the rods till through the collar ring (G), the canopy (F) and the collar loop part (E) when install the rods (O)/(P) on the threaded connector (Q).
6. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF
7. Wrap both safety cables with connectors (A) and lock the steel cable lock (V) at the end of the steel cable (M), then push the cables into the outlet box.
8. Fix the canopy (F) to the ceiling with the collar ring (G) and then link the collar loops (E) and (L) with the open ring (K) accordingly.

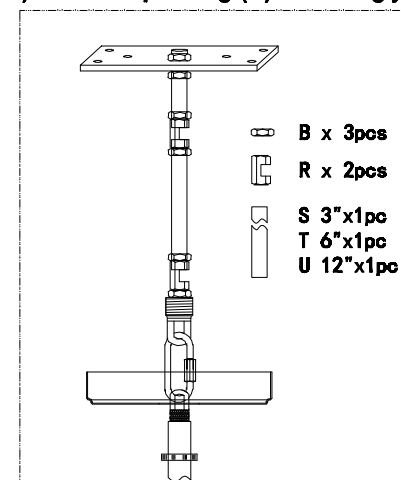

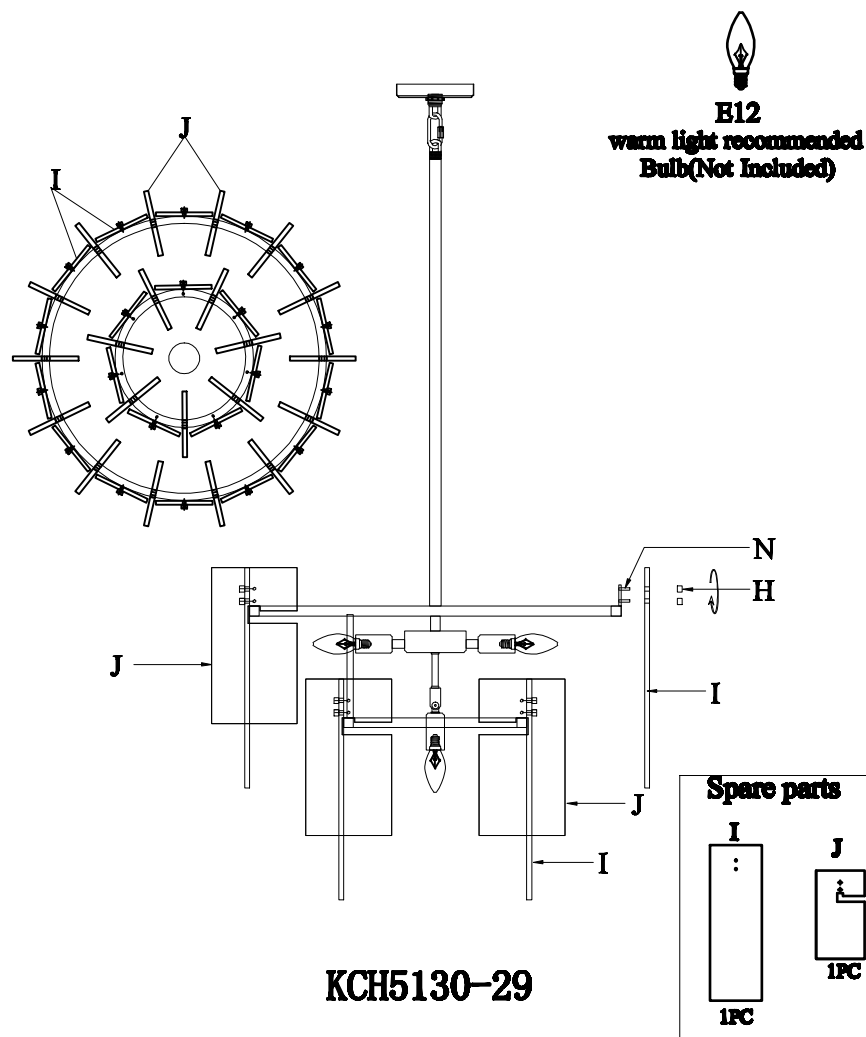

O	P	H	I	J	B	S	T	U
								
1PC	4PCS	84PCS	21PCS	21PCS	3PCS	1PC	1PC	1PC
					R	V		
								
					2PCS	1PC		

9. Install the bulbs (NOT INCLUDING) on the sockets

10. Then affix the Glass plaques (I)/(J) on thread bars (N) with the screws (H) according to the illustration. (CAUTION: THE GLASS PLAQUES (J) MUST BE INSTALLED AT FIRST COMPLETELY, AND THEN FOLLOW THE GLASS PLAQUES (I) AND THE SMOOTH FACE OF THE GLASS PLAQUES (I) SHOULD BE OUTWARD)

11. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

