

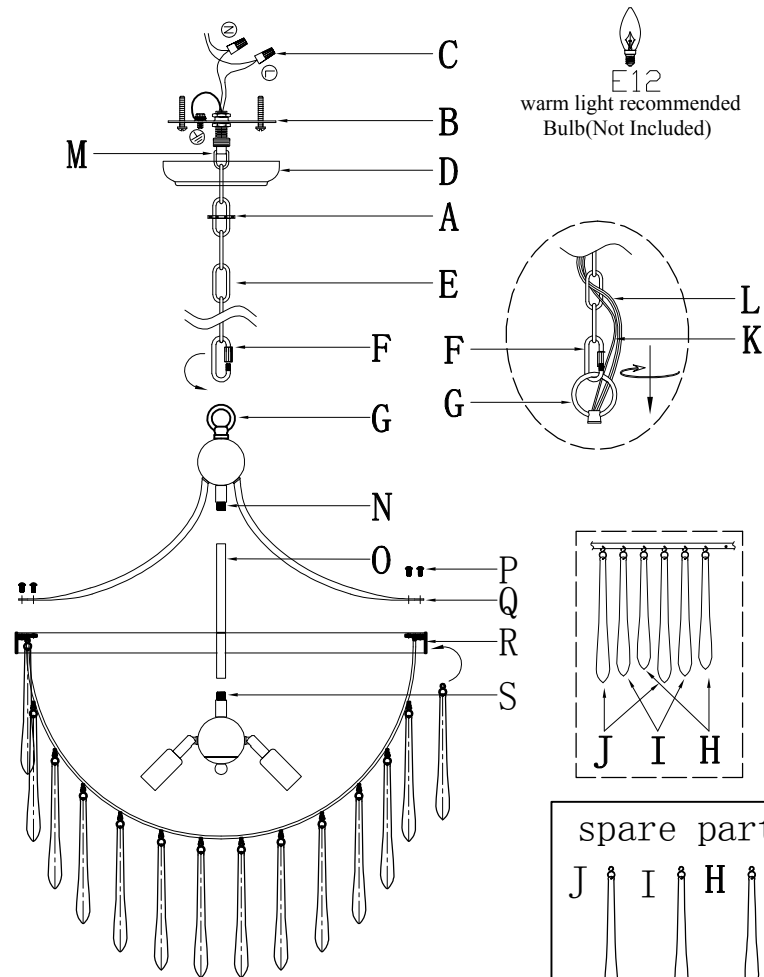


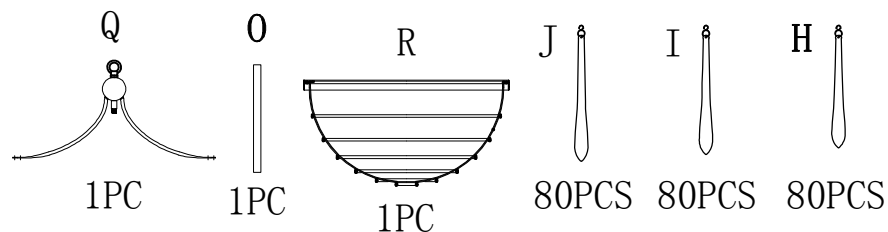

H25103-6



Assembly Instructions

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

1. Carefully remove all parts from the box.
2. Put the cable through the rod (O) and the loop (G) when install the rod (O) into the screw nipple (S) (N). then Place the lamp body (Q) on the iron wire frame (R) and affix with the screws (P) according to the illustration.
3. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
4. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain (E) as needed using a pair of chain pliers.
5. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (L) and naked earth cable (K) through the chain (E) in every 3-4 rings until through the ceiling loop (M).
6. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
7. Affix the mounting bracket (B) on the outlet box.
8. Wrap both safety cable with nipples (C) , push the cable into the outlet box.
9. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
10. Install the bulbs (NOT INCLUDING) on the sockets.
11. Install the glass bar (H)(I)(J) in the lamp body from the bottom to the top rings according to the illustration.
12. Installation is complete, turn on power at fuse or circuit breaker.

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents

