


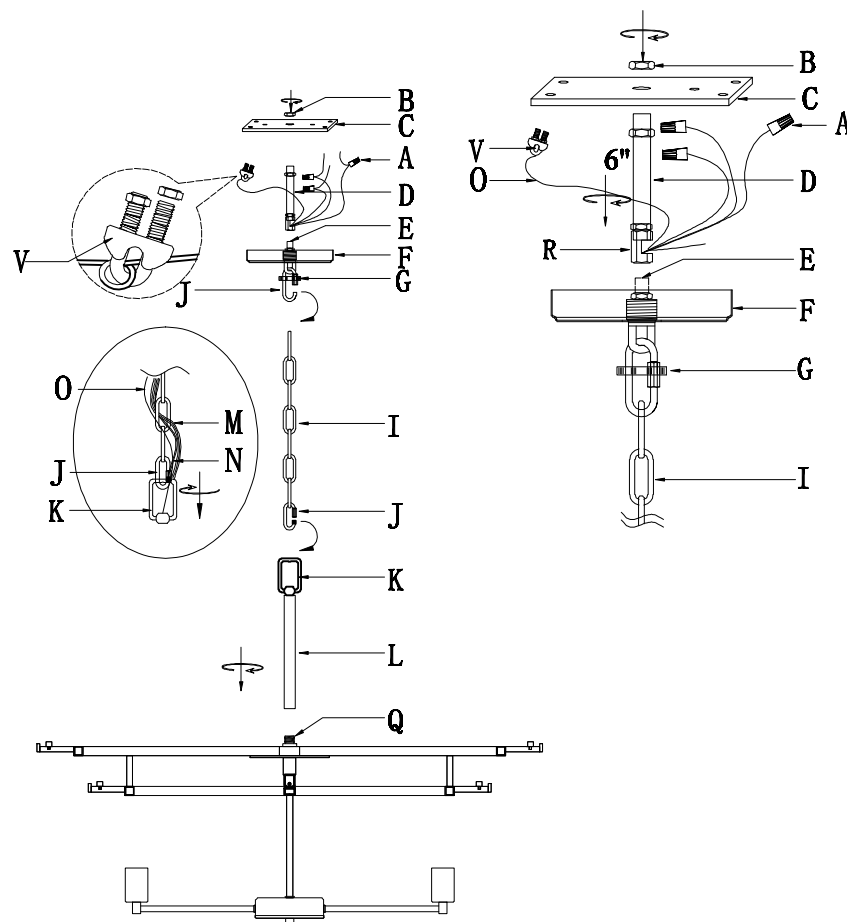

KCH5161T-35


Assembly Instructions


WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

***** THIS IS A HEAVY CHANDELIER OVER 50 POUNDS *****

1. Carefully remove all parts from the box
2. Fix the rod part (D) on the backer plate (C) with lock nut (B) (If not long enough, link the extension rods (S) (T) (U) with couplers (R) and lock nuts (B)) and then install the collar loop part (E) on the rod part (D) firmly according to the illustration.
3. Then fix the whole backer plate part to the wooden keel/concrete or steel ceiling structure frame firmly.
4. Take off the collar ring (G) from the collar loop part (E).
5. Link the centre pole (L) and the threaded connector (Q) together
6. Use the open ring (J) to link the chain (I) and the loop (K), then put the cable (M) and naked earth cable (N) steel safety cable (O) through the chain (I) in every 3-4 rings until through the canopy (F) and the collar loop part (E) and put them through the coupler (R) finally according to the illustration. (If the chain (I) too long, *use the dimensions of the fixture as a guide, shorten the chain (I) as needed using a pair of chain pliers.*)
7. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF
8. Wrap both cables (M) (N) with connectors (A) and lock the steel cable lock (V) at the end of the steel safety cable (O) ,then push the cables into the outlet box.
9. Fix the canopy (F) to the ceiling with the collar ring (G)

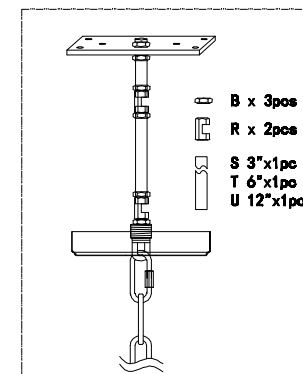


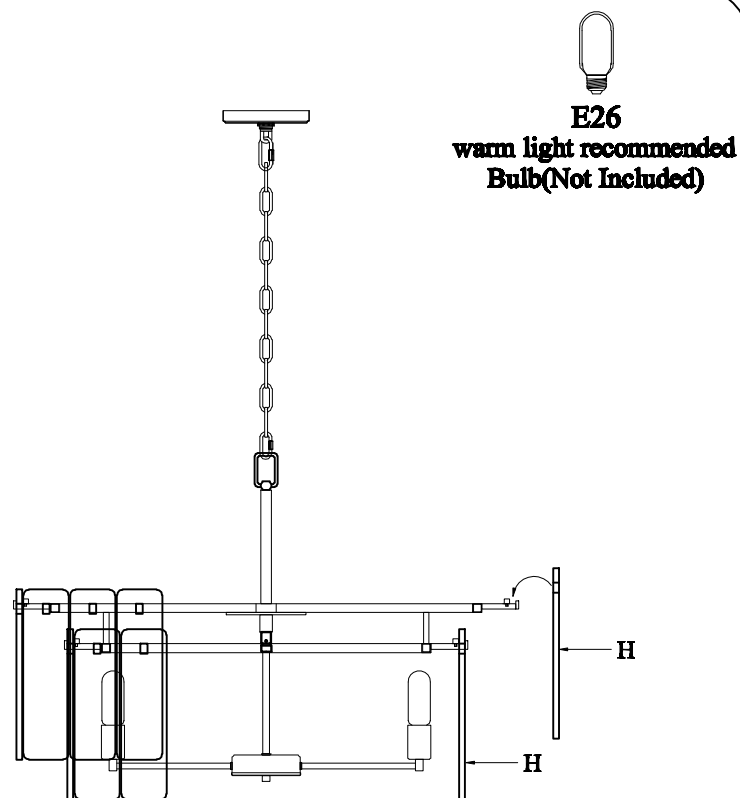

E26
warm light recommended
Bulb(Not Included)

KCH5161T-35

Spare parts



2PCS



59PCS



3PCS



2PCS



1PC



1PC



1PC



1PC

10. Install the bulbs (NOT INCLUDING) on the sockets, and then install glass plaques (H) on the lamp body from the bottom layer to the top layer according to the illustration.

11. Installation is complete, turn on power at fuse or circuit breaker.

*****Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents*****

