

IMPORTANT SAFETY INSTRUCTIONS

1. These instructions are provided for your safety. It is important that they are read carefully and completely before installing the chandelier.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. This fixture has been rated from LED (80W, 2200LM,3000K) .
4. To avoid the risk of fire, do not exceed the recommended wattage.
The light fixture is meant for indoor use. DRY LOCATION ONLY. It must be connected only to 3-wire. Single-phase electrical systems (provided with Ground wire or equivalent protection system).
5. Keep it away from children.

WARNING:

- Turn-off electricity supply at main circuit panel before installing.
Do not connect electricity supply until your chandelier is fully assembled and installed.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off the chandelier and allow it to cool. Prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb.
- Keep flammable materials away from light bulb.
- Verify that the outlet box is securely attached to the building structure and is listed to support the weight of this fixture.


PRE-ASSEMBLY:

- Remove all parts and hardware from box along with plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended.

TOOLS REQUIRED (Not Included)

Philips screwdriver, Slotted Screwdriver, Wire Strippers Slip Joint Pliers, Measuring Tape, Chain Pliers, Wire cutters.

CHANDELIER INSTALLATION

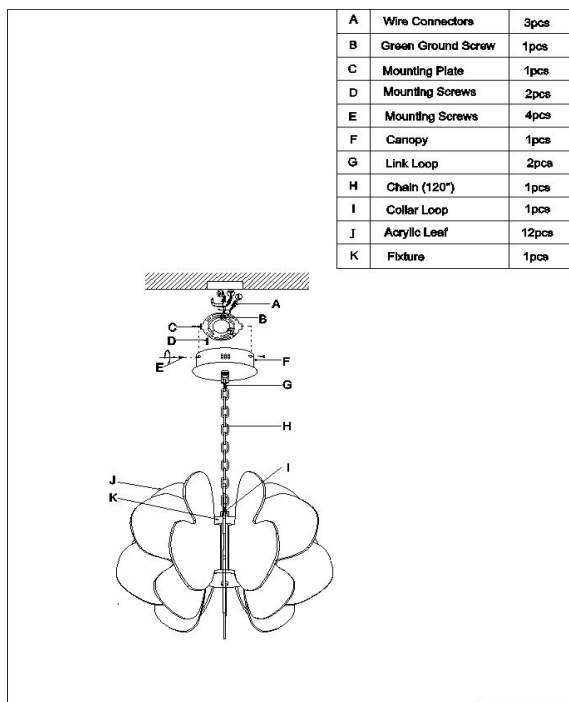

1. Unpack the Fixture: Carefully remove all parts from the carton and place them on a clean, soft surface to prevent damage.
2. Attach one end of the suspension Chain (H) to the Fixture Collar loop (I) using the supplied quick link (G). Tighten the quick link completely before proceeding.
3. Carefully unwind the fixture wires. Trim any excess wire, leaving sufficient length to (I) reach the junction box. Strip approximately 5/8 in. (16 mm) of insulation from each wire end.
4. Remove the Mounting Plate (C) from the Canopy (F) by loosening the Mounting Screws(D).
5. Secure the Mounting Plate (C) to the junction box using the provided Mounting Screws(D).
6. Gently pull the supply wires out from the junction box and allow them to hang freely.
7. Electrical Connections:
 - Connect the fixture ground wire (bare copper or green) to the building ground wire using the supplied wire connector.
 - Connect the fixture neutral wire (ribbed insulation) to the building neutral wire (white).
 - Connect the fixture hot wire (smooth insulation with markings) to the building hot wire (black).
 CAUTION: Do not reverse the hot and neutral connections.
8. Complete Wiring: Verify all wire connectors are tight. Carefully tuck all wiring into the junction box. Ensure no wires are pinched.
9. Install the Canopy: Adjust the suspension chain to the desired length before completing the canopy installation. Raise the canopy (F) and secure it to the mounting plate (C) using the mounting screws (E).
10. Level the Fixture: Adjust the fixture until it hangs straight and level. Verify that all quick links, threaded connections, and chain links are fully tightened
11. Restore power and verify that the fixture operates properly.

Maintenance

- Disconnect power before cleaning.
- Clean with a soft dry cloth only.
- Periodically inspect chain links, quick links, and mounting hardware to ensure they remain secure.
- Do not use abrasive cleaners or solvents.

INSTALLATION CHECKLIST:

- ☐ Outlet box securely fastened to building structure
- ☐ Mounting plate securely installed
- ☐ Suspension chain and quick links securely fastened
- ☐ Fixture hanging level
- ☐ Electrical connections completed
- ☐ Ground wire connected
- ☐ Wire connectors secure
- ☐ Wiring safely tucked into junction box
- ☐ Canopy installed flush to ceiling
- ☐ Decorative acrylic leaf installed and evenly spread
- ☐ Fixture tested successfully